



O&E Package Solution

Product Specification

Spec#: EWCP601-03

AFN: JDFZ-JS-A21

VER: 000

1. Product Description

1.1 Specifications : EWCP601-03

1.2 Drawing No. : HP1034001C

2. Product Specifications

2.1 Substrate Specifications

2.1.1 Material : Shell: 4J50 , Window: D236T

2.1.2 Size : Shell: H=3.25° φ3.15 , Window: φ4.5×0.21

2.1.3 Surface quality : Clear aperture optical surface conforms to MIL-PRF-13830B 60/40

Effective light transmission MIL-PRF-13830B 40/20, no pocking

2.1.4 Soldering : HFJD low-temperature glass 3#(Lead-Free Glass) sintering packaging

2.2 Finished Product Specification

Dimension (mm)	Depth (mm)	Effective Clear Aperture (mm)
3.25±0.05	2.6min	Φ2.8min

2.3 Spectrum Specifications

AR Coating on both side , T > 98%@1250-1650nm;

2.4 Airtightness

Leakage rate < 1X10⁻⁹ Pa·m³/s He

3. Appearance Quality

Quality Characteristic		Tolerance / Allowable Value		Instruments
Glass	gap	Depth	<0.2 mm allowed	Microscope
		Width	<0.2 mm allowed	
	pocking	According to the drawing		Microscope
	scratches	Total length less than ¼ diameter, width ≤0.04mm,		Microscope
Soldering	air bubbles	<¼ welding area , Acceptable In ¼ ~ ½ welding area≤3pcs Acceptable > ½ welding area Not allowed		Microscope

	packaging	No notch, impurities and other defects in welding area	
	overflow of solder	Functional area \geq Minimum Effective Clear Aperture	
Shell	burr	Maximum: 0.02mm	Microscope
	spots	Covered by a metallized layer and intact	
	rust	Not allowed	
	color	No color difference Overall color uniform Acceptable	
	surface	No fouling, bubbling, oxidizing black spots and other welding pollution	Microscope

4. Reliability test

Item	Methods	Criteria	Sampling	Instruments
Solderability	Soldering in high temperature 400°C. After cooling down, using thrust meter to detect thrust.	Trust of welding > 3kg/mm ²	Per lot	Thrust meter
High temperature boiling	100°C/0.095-0.105Mpa/10H	Air tightness <1X10 ⁻⁹ Pa·m ³ /s He	Per lot	High temperature cooking equipment Leak detector


5. Package

- 5.1 The product packaging box uses anti-static materials to ensure the cleanliness of the packaging box and ensure that the materials will not be polluted and corroded.
- 5.2 The boxes are packed into clean bags, filled with desiccant and vacuum baled.
- 5.3 The vacuum packaging bag is attached with a label, which contains: Lot No., product name, quantity, delivery date, and company name.
- 5.4 The packing box needs to have flexible materials such as foam to ensure that the vacuum of the packing box does not fail and is not damp.

6. Shipping

- 6.1 The products should be packed in a sturdy box. The box should meet fragile goods transport requirements.
- 6.2 Avoid direct exposure to the rain, snow and mechanical collision during transportation.
- 6.3 Inspection reports should be packed in the packing box and the report should meet the requirements according to the drawings.

7. Spectrum

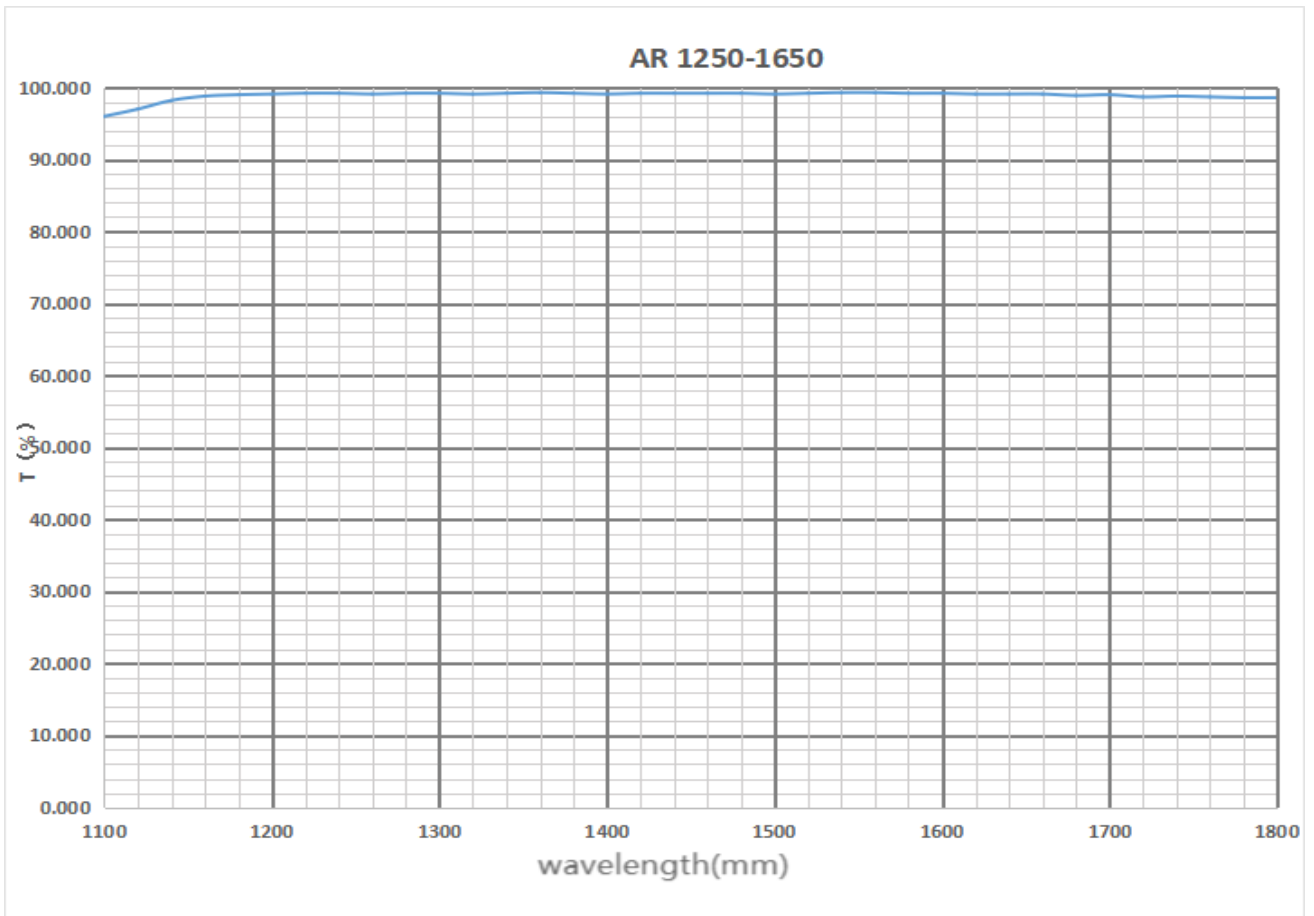

8. Drawing No. : HP1034001C

